



DEGO

Definition of Sound

Space 3000 MW 80

HIGH TECH ALUMINIUM CONE DRIVER

Instruction manual for Midrange set

Article-No. 970 0057 00

Space Series

Designed, engineered & manufactured in Germany

CONGRATULATIONS!

You have just purchased the DEGO midrange SPACE 3000 MR 80.


The High-quality 80 mm midrange driver for a very balanced frequency response with aluminum dome and small installation dimensions makes the Space midrange one of the finest speakers in German engineering.



SPACE 3000 MR SPECIFICATIONS


DC resistance	R_e	3.4	Ω
Nominal impedance	Z_N	4	Ω
Voice coil inductance	L_e	0.10	mH
Voice coil diameter		25	mm
Voice coil height		3	mm
Height of gap		4	mm
Linear excursion		± 0.5	mm
Max. mech. excursion		± 6.5	mm

Frequency response [1W/1m]

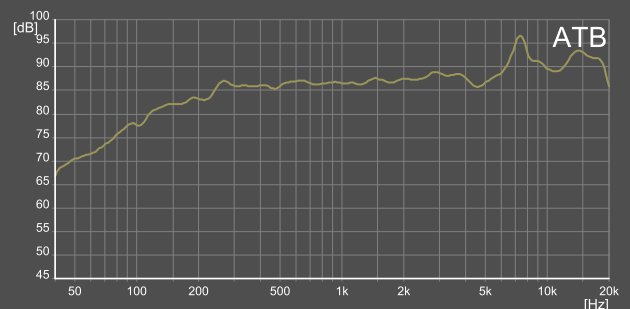


Resonance frequency	f_s	111	Hz
Mechanical Q factor	Q_{ms}	3.03	
Electrical Q factor	Q_{es}	0.44	
Total Q factor	Q_{ts}	0.39	

Impedance

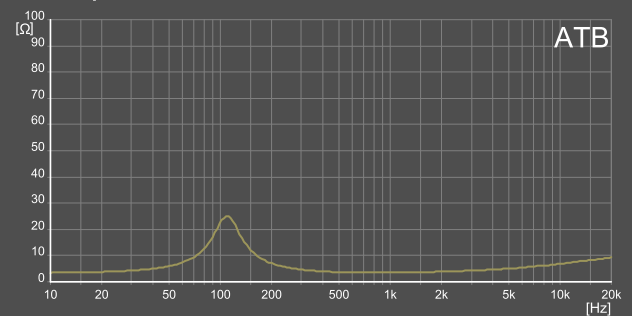

Moving mass	M_{ms}	3.19	g
Effective piston area	S_d	35	cm ²
Mechanical resistance	R_{ms}	0.74	Kg/s
Compliance	C_{ms}	0.64	mm/N
Force factor	Bl	4.07	Tm
Equivalent air volume	V_{as}	1.10	dm ³
Efficiency	η	0.33	%
SPL 1W/1m		87.2	dB
SPL 2.83V/1m		91.0	dB



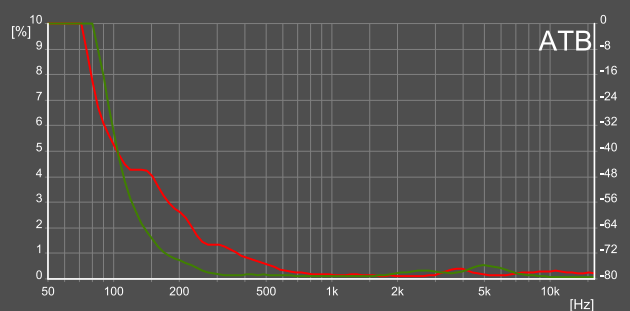


Designed, engineered & manufactured in Germany

SPACE 3000 MR 80 SPECIFICATIONS

Midrange	80	mm
Impedance	4	Ω
Nominal Power	40	W
Peak Power	65	W
Frequency Response	200 - 15K	Hz
Sensitivity 1W/1m	90	db

Mounting depth	36.2	mm
Outside diameter	82	mm
Mounting diameter	70	mm

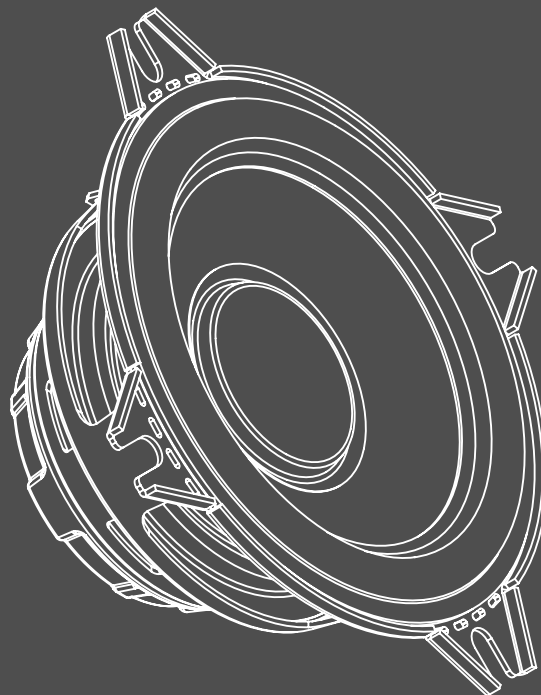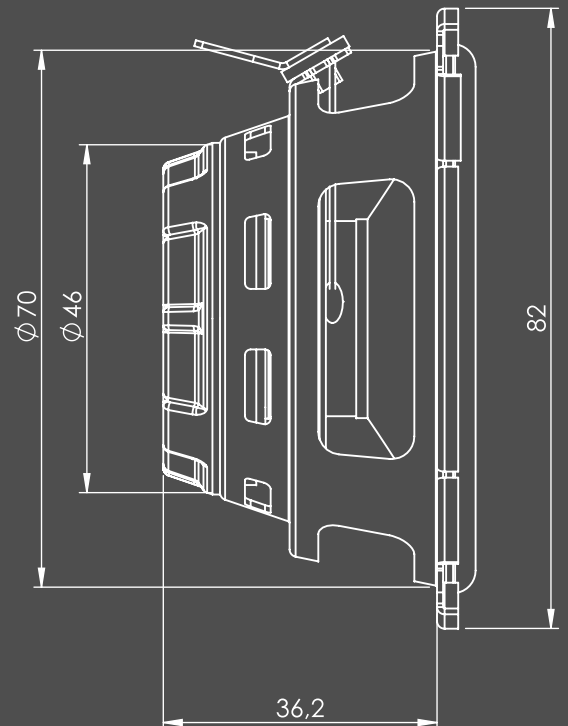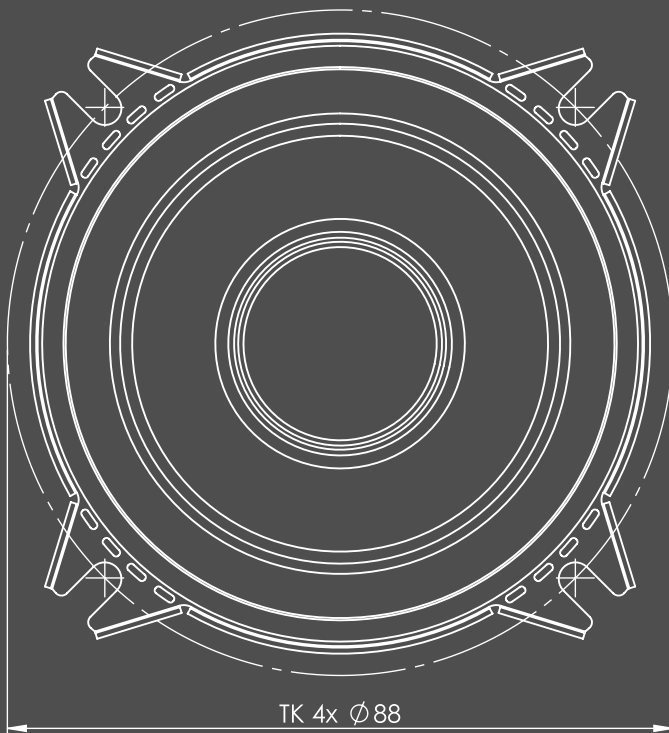





Definition of Sound

4 Ohms



SP 3.0 MR
Made in Germany

- +