

High Quality SP15X Subwoofer Speaker

High Quality SP15X Subwoofer Speaker

Applications:

SP15X Subwoofer series is a professional Big power handling and high efficiency line for car audio competition

Features

SP15X





Features

- 84 dB SPL 1W/1M
- 4"AL Wire (280°C)
- 6000 W RMS Power
- PC+Nomex Spider
- 2+2 Ohms Impedance
- 119×4 Oz Y30 Ferrite Magnet

Mounting Information

SP15X

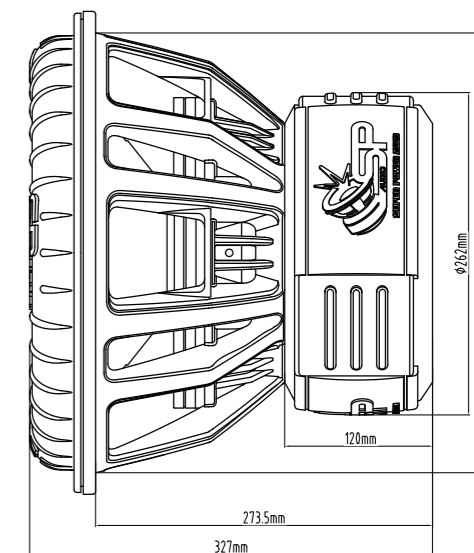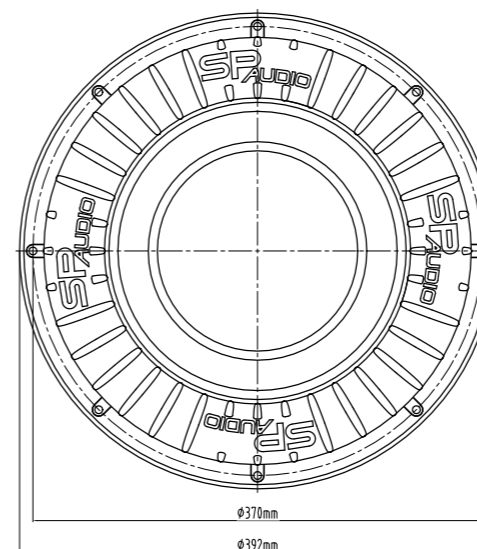

General Specification

SP15X

Nominal Diameter	380 mm (15inch)
Rated Impedance	4 Ohm
Minimum Impedance	2+2 Ohm
Rated Power (RMS)	6000 W
Peak Power	12000 W
Sensitivity	84 dB
Frequency Range (-10dB)	25-300 Hz
VC Diameter (in)	4 Inch
Winding Material	280°C Aluminum Wire
Suspension	Large "R" Form
Cone	Compress Paper + FiberGlass

Parameters:

Parameter Model	Qts	Vas	Fo	Re	Mms	Xmax	Cms	Qms	Qes	SPL	Pe	BL	Sd
SP15X	0.634	32.61 L	31.4 Hz	4 Ohm	634.73 g	32.5 mm	0.04 mm/N	5.088	0.724	84.0 dB	6000 W	25.25 TM	754.77 cm ²

Vent BOX

SP15X

Volume: 95 L
 Tuning freq: 31.4 Hz
 Vent diameter: ϕ 110 mm
 Shape: Circle
 End correction: Two flanged end
 Vent length: 26.5 cm
 Cross area: 88.2 cm²



Impedance:

